




# Halyard lock fittings

Main halyard locks are ideal for guaranteeing that your mainsail is always hoisted to the measurement band, with the hoist position unaffected by mast bend. The lock also reduces mast tip compression making the fitting a must for any champion. There are various options – the alloy lock is used for most dinghies. Designed for 2 mm wire, now available in its own cassette for simple fitting. The larger lock is better suited to small keelboats, taking a 2.5 mm or 3 mm halyard, and is available in stainless steel, or titanium for the ultimate in weight saving and strength. The small V-lock is ideally suited to external halyards for Europes, Finns, Splashes and OKs.

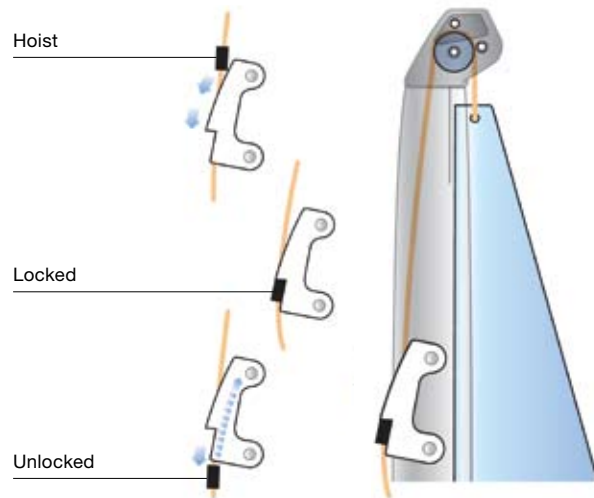

	Art. No.	Description		Art. No.	Description
	511-202-01	Alloy lock in its own easy-to-fit cassette		508-481	Titanium super-lock for 2.5-3 mm wire
	508-483-01	Alloy dinghy lock, suits 2 mm wire		508-482	Stainless steel halyard lock for 2.5-3 mm wire
				508-484	Stainless steel lock for 2-3 mm wire for external halyards