

SELDÉN

COMPLEMENTARY HARD WARE

SWIVEL LOCK

An insert is used to locate the shackle at 0° or 90°. When removed the shackle spins freely.

Used for BBB 30, BBB 40, BBB 60, ARB 45 and MRB 60.



SWIVEL LOCK

Art. No.	Dimension	Weight (g)	Combine with...	
1	403-131R	20x16x7	1	BBB 30, Single/Fiddle
2	404-131R	26x18x5	1	BBB 40, Single/Fiddle, ARB 45 Single/Fiddle
3	406-610R	33x19x6	2	BBB 60, Single/Fiddle, MRB 60 Single/Fiddle
4	406-611R	30x22x10	2	BBB 60, Double/Triple, MRB 60 Triple


SHEET LEAD

Machined and black anodised sheet lead designed to lead lines over deck or to achieve correct angle to a winch. The smooth finish of this sheet lead gives minimal friction, allowing it to replace blocks in some applications. Works well as a lead on the windward spinnaker guy on boats up to 35'.



Sheet lead

Multi lead

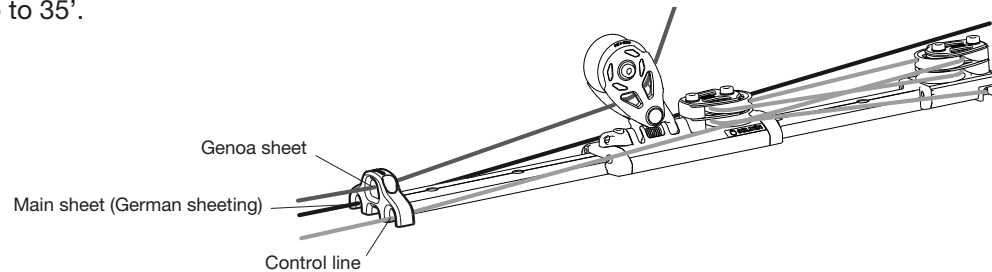

SHEET LEAD

Machined aluminium

Art. No.	Dimension	Weight (g)	Safe working load (kg)*	Breaking load (kg)	Max line size (mm)	Bolts	
5	442-136R	c-c 35	23	700	1400	10	2xM6
6	443-136R	c-c 40	56	1100	2200	12	2xM8
7	443-162R	c-c 40	103	1100	2200	8/12	2xM8

FAIRLEAD

Polyamide

Art. No.	Dimension	Weight (g)	Max line size (mm)	C-C (mm)	
8	508-600R	25x10	1	5	15
9	508-601R	38x15	5	8	23
10	508-603R	25x10	4	5	15
11	508-604R	39x15	12	10	25
12	508-605R	52x20	30	14	34
13	508-609R	25x10	1	3	15
14	508-610R	25x10	3	4	15
15	508-611R	38x15	8	8	23

8 → 9



10 → 12



13



14 → 15

