



SNAP SHACKLE ADAPTOR

A brilliant solution for any application you want to attach and remove quickly, for example runners and check stays. Just replace the standard shackle with a snap shackle.




Low friction shackle for barber hauler and 2:1 purchase



LOW FRICTION SHACKLE

This new snap shackle has a big, well rounded loop allowing the rope to slide with low friction. Compared to a regular snatch block, this shackle is lighter, easier to operate and lower cost. Typical applications are barber haulers for spinnaker and jibs but also to tension a Seldén CX with 2:1 purchase. This not only makes for better performance but it also makes it easier to connect the Seldén CX to a bowsprit, from the foredeck. The shackle is made of high strength Duplex steel and has a quality mirror finish.

This block is used for 2:1 purchase for a Code 0 or main halyard. The pin is captive. No risk dropping it over board.

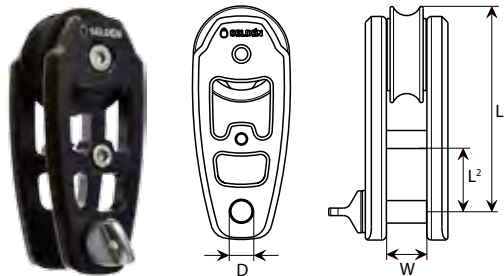

BLOCK FOR 2:1 PURCHASE

Art. No.	Dim.	Weight (g)	L ¹	L ²	W	D	Safe working load (kg)	Breaking load (kg)	Max line size (mm)	Combine with...
403-501-01R	30	100	68	21	13	8	1500	3000	10	CX15
404-501-01R	40	187	85	26	18	10	2500	5000	12	CX25, GX25
405-501-01R	50	335	104	31	24	12	4000	8000	16	CX45

1 4 → 8



2 → 3

9 → 10



11 → 15



SNAP SHACKLE ADAPTOR

16 → 19



LOW FRICTION SHACKLE

FORGED SHACKLES

Stainless AISI 316, Duplex (307-004R)

	Art. No.	Dimension	Weight (g)	Safe working load (kg)	Breaking load (kg)	Combine with...
1	307-004R	Ø12x24x41	186	4000	8000	PBB 100
2	307-026R	Ø8x16x35	56	1500	3000	PBB 70 RBB 60
3	307-027R	Ø10x19x41	126	2000	4000	PBB 80
4	307-080R	Ø4	8	250	500	BBB 30 BBB 40
5	307-081R	Ø5	16	700	1400	PBB 50, BBB 40* BBB 60**, MRB 60**
6	307-085R	Ø8/10	76	2000	4000	PBB 80 RBB 80
7	307-086R	Ø6	26	1100	2200	PBB 60 BBB 60**, MRB 60**
8	307-097R	Ø6/8	40	1500	3000	PBB 70 RBB 60
9	307-098R	Ø5x11x26	18	700	1400	PBB 50
10	307-099R	Ø6x12x33	32	1100	2200	PBB 60

Max working load/breaking load are valid when the shackle is fitted to appropriate Seldén block. *Only used on BBB 40 triple. **Only used on BBB 60/MRB 60 double/triple.

SNAP SHACKLE ADAPTORS/ LOW FRICTION SHACKLES

Duplex 2205 stainless

	Art. No.	Dim.	Weight (g)	Safe working load (kg)	Breaking load (kg)	Combine with...
11	404-040-01R	40	25	550	1100	BBB 40
12	405-040-01R	50	60	700	1400	PBB 50, CX10, GX7,5, GX10
13	406-040-01R	60	96	1500	3000	PBB 60, PBB 70, BBB 60 RBB 60, CX15, GX15
14	408-040-01R	80	232	2500	5000	PBB 80, RBB 80, CX25, GX25
15	410-040-01R	100	490	4500	9000	PBB 100, CX45
16	307-435-01R	50	70	900	1800	PBB 50, CX10, GX7,5, GX10
17	307-436-01R	60	118	1500	3000	PBB 60, PBB 70, BBB 60 RBB 60, CX15, GX15
18	307-437-01R	80	278	2500	5000	PBB 80, RBB 80, CX25, GX25
19	307-438-01R	100	540	4000	8000	PBB 100, CX45