




BALL BEARING BLOCK 40

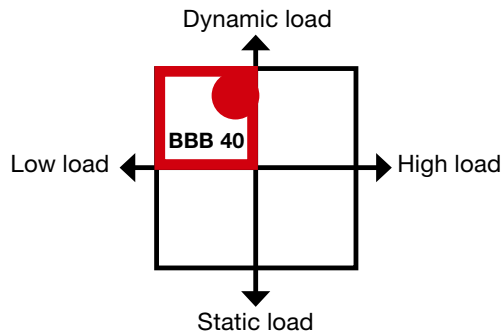

For more information about dimensioning, see page 98.

TECHNICAL FEATURES BBB 40

- Stainless steel ball bearing races, stainless steel ball bearings and Acetal sheave for best bearing strength even under high dynamic loads.
- Acetal bearing cage to prevent ball-to-ball friction and to reduce weight.
- Glass fibre reinforced composite.



404-040-01R Snap shackle 40 makes it easy to remove the block when needed. It can be fitted to all Seldén BBB 40 blocks and. See page 92 for more information.

12



Fiddle swivel/fixed

13

Fiddle swivel/fixed,
bucket

14

Fiddle swivel/fixed
cam

15

Fiddle swivel/fixed
bucket cam

16



Single tie on

17



Single cheek

18



Fiddle hook cam

19

Fiddle hook cam
eye

20

Single bucket strap
(The strap can be
removed)

21



Single through deck

22



Single lead

23

Double through
deck**BBB 40**

	Art. No.	Weight (g)	Safe working load (kg)	Breaking load (kg)	Max line size (mm)	Shackle/ fasteners (Ø mm)
1	404-101-01R	55	250	500	10	4
2	404-101-02R	45	250	500	10	-
3	404-101-03R	60	250	500	10	4
4	404-101-04R	100	90*	180	7	4
5	404-101-05R	104	180*	360	7	4
6	404-101-06R	98	500	1000	10	-
7	404-101-07R	102	500	1000	10	-
8	404-101-08R	168	750	1500	10	5
9	404-101-09R	171	750	1500	10	5
10	404-101-10R	216	450*	900	7	5
11	404-101-11R	220	540*	1080	7	5
12	404-101-12R	66	250	500	10	4
13	404-101-13R	70	250	500	10	4
14	404-101-14R	107	250	500	7	4
15	404-101-15R	115	250	500	7	4
16	404-101-16R	48	250	500	10	-
17	404-101-17R	49	250	500	10	2xM5 (not included)
18	404-101-18R	118	250	50	10	-
19	404-101-19R	120	250	500	10	-
20	404-101-20R	50	250	500	10	-
21	404-101-22R	53	250	500	10	2xM5 (not included)
22	404-101-23R	42	250	500	10	2xM5 (not included)
23	404-101-24R	93	250	500	10	2xM5 (not included)

* Safe working load based on cam cleat 433-101-01.